

Enclosed Outdoor Signage - 75XE3C

Outstanding Visibility with Advanced Reliability



The 75XE3C Enclosed Outdoor Signage Display provides excellent image quality and high durability, even in less than ideal outdoor settings such as direct sunlight and rain. It is designed for long-term reliability and performance in various weather conditions.

Key Features

Outstanding Visibility

Smart Brightness Control

The auto-brightness sensor and preset time scheduler helps save power whenever possible.



Advanced Localized Dimming

The display can be controlled to increase contrast and provide a clearer image with twice the detail.



Quarter Wave Plate (QWP)

This technology is embedded with a QWP which enables clear visibility even when the viewer is wearing polarized sunglasses.



Advanced IPS Technology


Wide Viewing Angle

IPS technology creates a wide viewing angle, showing the same crisp, clear image at any angle within 178 degrees from the top, bottom, right and left.



No Blackening Effect

Even under direct exposure to sunlight, the 75XE3C display resists blackening defects up to 230° F / 110° C.




Anti-reflection

The display resists external light & back light thanks to anti-reflection coating.



Enclosed Outdoor Signage - 75XE3C

Outstanding Visibility with Advanced Reliability

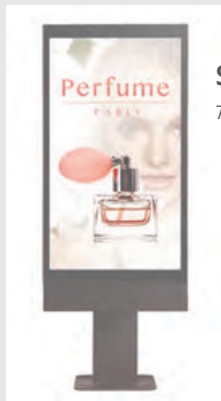

Screen Size

75" Class (74.52" diag)

- Brightness : 3,000 cd/m²
- Operating Temperature : 230° F / 110° C.
- Bezel: 75"-Top: 110 mm / 4.33 in; Bottom: 230 mm / 9.06 in; Left / Right: 73.3 mm / 2.89 in
- Depth: 75"-218.9mm / 8.62 in
- Interface: HDMI/DP / DVI / RJ45 / IR / RS232C / USB3.0 / External speaker out



Other Features

Product Reliability




Dust & Humidity Protection Designed with IP56 Rating

The conformal coating enhances reliability by protecting the display from dust, iron shavings, humidity and other harsh conditions.




Protection Against High and Low Temperatures

The panel provides reliable operation within a wide range of temperatures, from -22° F up to 130° F, protecting against frozen components and over-usage of the cooling fan.

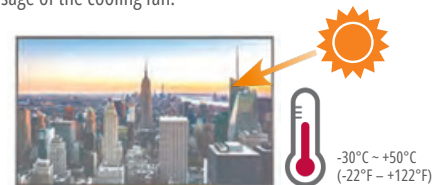

Enhanced Thermal Management

The environmentally sealed outer structure provides waterproofing and protection against the elements and other environmental contaminants such as brake dust and car exhaust fumes.



Three-layer thermal management

9.5mm Protective Glass**

Designed with durability to protect the panel from impact and vandalism, the protective glass also features OCA* film to guard against heating in direct sunlight.



* Optically Clear Adhesive
**75XE3C standard

Cost Effective



Low Power Consumption Using The M+ Panel

The M+ panel offers excellent energy efficiency and cost savings and decreases power consumption by approximately 31% compared to conventional RGB panels*.

* With same luminance



Easy Management



Web Monitoring

The embedded web monitoring allows for easy remote management and real-time diagnostics and measurements of items such as temperature and ambient light.



Optional Stand

The optional stand allows the panel to easily stand freely and enables easy cable management. The XE3C series can also be mounted in landscape or portrait modes, facilitating a variety of use cases.



1 x 1 optional stand


Enclosed Outdoor Signage - 75XE3C

Outstanding Visibility with Advanced Reliability


Dimensions (unit : mm)

75"


(Monitor Side)

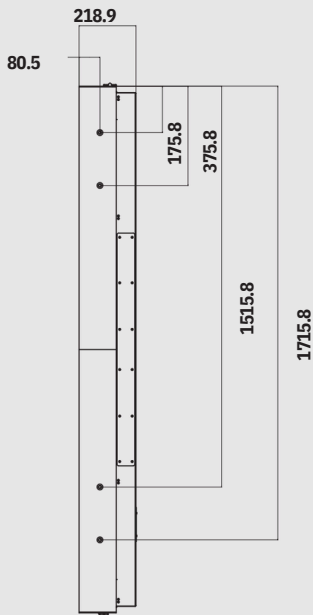


(Stand Front)

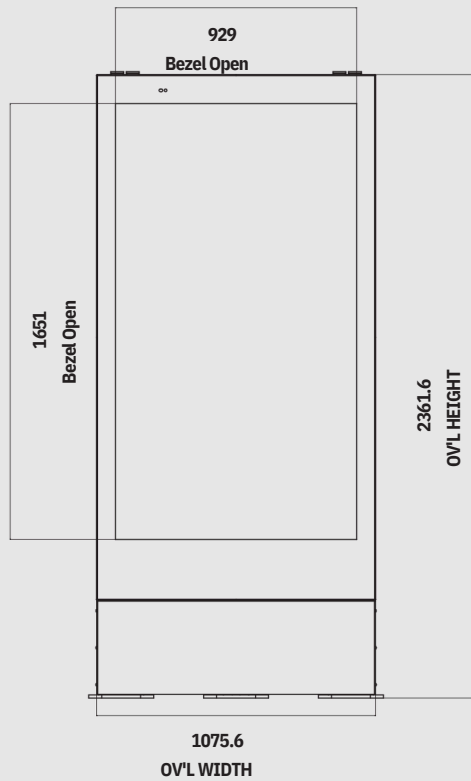


(Stand Side)

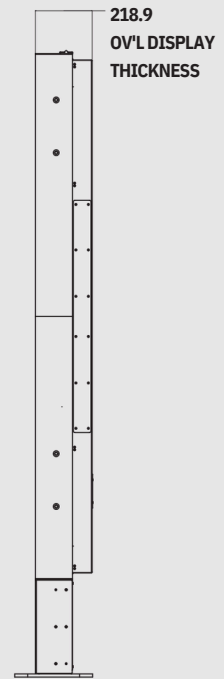


(Monitor Top)



(Monitor Bottom)

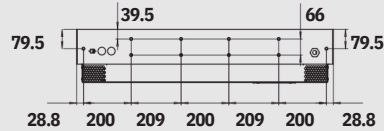

(Stand Bottom)

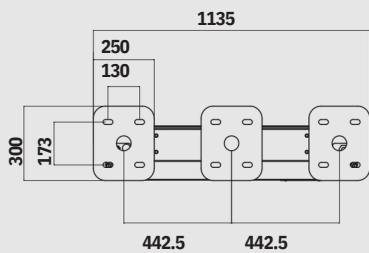

Specifications

XE3C Series		75XE3C
PANEL	Screen Size	75" Class (74.52" diag)
	Panel Technology	IPS
	Aspect Ratio	16:9
	Native Resolution	3,840 x 2,160 (UHD), M+
	Brightness	3,000cd/m2 (Typ.) 2,400cd/m2 (min) through front protective glass
	Contrast Ratio	1,200:1
	Viewing Angle (H x V)	178 x 178
	Response Time	8 ms (Typ.) (G to G BW)
	Surface Treatment	Hard coating (2H), Anti-glare treatment of the front polarizer (Haze 3% (Typ.))
	QWP Polarizer (FPR Film)	Yes
	Local dimming	48 Block
Orientation	Portrait only	
CONNECTIVITY	Input	HDMI, DP, DVI-D, Audio
	Output	DP, External Speaker (*waterproof speakers are mandatory for outdoor installation)
	External Control	RS232C, RJ45, SD Card, USB 3.0
PHYSICAL SPECIFICATION	Front glass	9.5 mm (AR, Front Safety Vandal Glass)
	Bezel Color	Medium Texture Black (Common color)
	Bezel Width	110 mm (T), 230 mm (B), 73.3.0 mm (L/R)
	Monitor Dimension (W x H x D)	1,075.6 x 1,991.6 x 218.9 mm
	Weight (Head)	180 kg
	Monitor with Optional Stand Dimensions (W x H x D)	1,075.6 x 2,361.6 x 218.9 mm
	Weight (Head+Stand)	240 kg
	Packing Dimensions (W x H x D)	1,308 x 2,296 x 468 mm
	Packed Weight	15 kg (TBD)
	Handle	Option (I-Bolt)
SPECIAL FEATURES	Temperature Sensor, Tile Mode, Natural Mode@Tile Mode, Auto-Brightness Sensor, Pixel Sensor, Cooling Fan, ISM Method, DPM Select, Energy Saving, Smart Energy Saving, File Play with USB, Internal Memory (8 GB), Easy Brightness Control, Content Scheduling, Fail over, DP daisy chain	
ENVIRONMENTAL CONDITIONS	Operation Temperature	-30 °C to 50 °C
	Operation Humidity	5 % to 100 %
	Direct Sunlight	Yes
	Dust / Water Proofing	IP 56
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Consumption	Typ. / Max Smart Energy Saving 700 W / 1,000 W 350 W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	No / No
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No
	External Media player Attachable	No
SOFTWARE COMPATIBILITY	SuperSign W/Lite	Yes
	SuperSign C	Yes
ACCESSORIES	Basic	Remote controller, EIG, ESG, Regulation book, Phone to RS232C gender, USB cable, HDMI cable
	Optional	Media player (driven by customer), Enclosure Stand (ST-750X)