

46"	OM46N	46"	OM46N-D
55"	OM55N	55"	OM55N-D



One-sided brilliance or two? It's your choice.

OMN / OMN-D Series Single and Dual Signage Displays

The Samsung OMN/OMN-D series was designed to do one thing: engage customers. Exceptionally bright and colorful, sidewalk traffic can't walk by without noticing your messages. The OMN single display features 4000 nits brightness, for impact on the brightest days. Its sleek, slim design will look beautiful hanging in your windows. The OMN-D series features a double-sided display. The window-facing side's 3000-nit brightness helps maintain picture integrity regardless of sunlight, while the in-store side features 1000 nits to deliver information clearly. And you can install one OMN-D series display instead of two typical displays, saving you space and installation costs while increasing your appeal, inside and out.



OMN series single-sided display operates in both portrait and landscape. OMN-D series dual-sided display operates in portrait mode only.

Key Features



Brilliant, Glare-Free Picture Quality, One Side or Two

The OMN/OMN-D series displays deliver messages that are bright and clear. They deliver uncompromising picture quality that will capture the attention of potential customers, even in direct sunlight. The single-sided OMN series features 4,000-nit brightness, while the dual-sided OMN-D series features 3,000-nit brightness on the exterior-facing panel and 1000 nits on the interior-facing panel.



Slim Design Fits Seamlessly into Any Display Window

The OMN and OMN-D series displays feature a remarkably slim design that can be easily mounted either on a stand or hung from a ceiling, giving retailers more placement options. The smart design offers flexibility in how valuable space on the floor is designed and utilized, while integrating cleanly into any store's design style.



All-in-One Signage Solution

Each display features its own MagicINFO Player S6, backed by the powerful Tizen operating system. It allows for easy content management and ensures seamless content transition and playback. All without the need for an external signage player or PC.



MagicINFO

Our leading-edge digital signage platform makes content management easier, more flexible and more robust.*



Samsung Circular Polarizing Technology

Samsung's circular polarizing technology allows content to be easily viewed even while wearing polarized sunglasses.



Durable 24/7 Performance and 3-Year Warranty

OMN/OMN-D series displays will deliver impactful messaging 24/7. They're IP5X-validated for dust protection and are engineered to prevent overheating. A 3-year warranty adds peace of mind.



Clean and Clutter-Free


An integrated cable guide provides a clean, organized look, while embedded Wi-Fi allows content and firmware updates without the need for excessive cables.

Samsung OMN/OMN-D Series In-Window Displays

			OM46N	OM55N	OM46N-D	OM55N-D
Panel	Diagonal Size	Class Measured	46" / 45.9" / 116.8 cm	55" 54.6" / 138.7 cm	46" 45.9" / 116.8 cm	55" 54.6" / 138.7 cm
	Type		120Hz E-LED BLU	120Hz E-LED BLU	120Hz E-LED BLU	120Hz E-LED BLU
	Resolution		1920 x 1080 (16:9)	1920 x 1080 (16:9)	1920 x 1080 (16:9)	1920 x 1080 (16:9)
	Brightness (Typ.)		4,000 nits	4,000 nits	4,000 nits	4,000 nits
	Contrast Ratio (Typ.)		5,000:1	5,000:1	5,000:1	5,000:1
	Viewing Angle (H / V)		178 / 178	178 / 178	178 / 178	178 / 178
	Response Time (G-to-G)		6ms	6ms	6ms	6ms
	Display Colors		8 bit - 16.7M	8 bit - 16.7M	8 bit - 16.7M	8 bit - 16.7M
	Color Gamut		72%	72%	72%	72%
	Operation Hours		24/7	24/7	24/7	24/7
Panel Orientation		Landscape / Portrait	Landscape / Portrait	Landscape / Portrait	Landscape / Portrait	
IP5X Rating		Yes	Yes	Yes	Yes	
Special Certifications		DisplayPort 1.2 (1) HDMI2.0 (2)	RS232C (In / Out), RJ45 (In / Out) Detachable Type (IR, Ambient)	Detachable Type (IR, Ambient (Outdoor Only))	RS232C (In), RJ45 (In) Detachable Type (IR, Ambient (Outdoor Only))	
Connectivity	Input	RGB	HDCP 2.2	Yes	Yes	Yes
		Video	USB 2.0 (1)	Internal	Internal	Internal
		HDCP	HDMI 2.0	AC 100 - 240 V~ (+/- 10%), 50 / 60 Hz	AC 100 - 240 V~ (+/- 10%), 50 / 60 Hz	AC 100 - 240 V~ (+/- 10%), 50 / 60 Hz
		USB	Yes	450 W	380 W	380 W
		Audio	Stereo Mini Jack	420 W	380 W	500 W
	Output	RGB	Yes	< 0.5 W	< 1 W	470 W
		Video	RS232C (In / Out), RJ45 (In / Out)	< 0.5 W	< 0.5 W	< 1 W
		Audio	Detachable Type (IR, Ambient)	1253.4 x 724.2 x 54.5mm / 49.35" x 28.51" x 2.15"	619.1 x 1107.5 x 69.5mm / 24.37" x 43.60" x 2.74"	726.8 x 1299 x 69.5mm / 28.61" x 51.14" x 2.74"
		External Control	Yes	Internal	Internal	Internal
		External Sensor	AC 100 - 240 V~ (+/- 10%), 50 / 60 Hz	1420 x 879 x 178mm / 55.9" x 34.61" x 7"	796 x 1255 x 327mm / 31.34" x 49.41" x 12.87"	940 x 1466 x 367mm / 37.0" x 57.72" x 14.45"
Power	Type	350 W	22.1kg / 48.72 lbs	12.87"	940 x 1466 x 367mm / 37.0" x 57.72" x 14.45"	
Power Consumption	Power Supply	330 W	28kg / 61.73 lbs	32kg / 70.55 lbs	39.5kg / 87.08 lbs	
	Max	< 0.5 W	400 x 400mm	19.9 (even)	42kg / 92.6 lbs	
	Typical	< 0.5 W	0°C~ 30°C (Direct Sunlight)	0°C~ 40°C (w/o Direct Sunlight)	52kg / 114.64 lbs	
	Sleep Mode	1062 x 616.6 x 54.5mm / 41.8" x 24.28" x 2.15"	10-80%	0°C~ 30°C (Direct Sunlight)	0°C~ 40°C (w/o Direct Sunlight)	
	Off Mode	1189 x 757 x 158mm / 46.81" x 29.8" x 6.22"	10-80%	0°C~ 30°C (Direct Sunlight)	0°C~ 40°C (w/o Direct Sunlight)	
Mechanical Specs	Dimensions	Set (W x H x D)	18.2kg / 40.12 lbs	23kg / 50.71 lbs	400 x 400mm	
		Package	19.9 (even)	0°C~ 30°C (Direct Sunlight)	0°C~ 40°C (w/o Direct Sunlight)	
	Weight	VESA Mount (mm)	0°C~ 30°C (Direct Sunlight)	0°C~ 40°C (w/o Direct Sunlight)	10-80%	
		Bezel Width (mm)	0°C~ 30°C (Direct Sunlight)	0°C~ 40°C (w/o Direct Sunlight)	10-80%	
Environmental Conditions	Operating Temperature	10~80%	IP 5X Rated, Polarized Sun Glasses Viewable in Any Direction, Portrait / Landscape Installation Support, Auto Brightness Control with Ambient Brightness Sensor, Temperature Sensor, RJ45 MDC, Auto Source Switching & Recovery, Clock Battery (80 Hrs Clock Keeping), Kensington Lock, Wi-Fi Module Embedded	IP 5X Rated, Polarized Sun Glasses Viewable in Any Direction, Portrait Installation Support, Auto Brightness Control with Ambient Brightness Sensor, Temperature Sensor, RJ45 MDC, Auto Source Switching & Recovery, Clock Battery (80 Hrs Clock Keeping), Wi-Fi Module Embedded (2 Ea, One Per Each Display)		
	Operating Humidity	10~80%				
Features	Internal Player (Embedded H/W)	Processor	Coretex A72 1.7GHz Quad-Core CPU	Coretex A72 1.7GHz Quad-Core CPU	Coretex A72 1.7GHz Quad-Core CPU	Coretex A72 1.7GHz Quad-Core CPU
		On-Chip Cache Memory	L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB	L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB	L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB	L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB
		Clock Speed	1.7GHz	1.7GHz	1.7GHz	1.7GHz
		Main Memory Interface	2.5GB	2.5GB	2.5GB	2.5GB
		Graphics	LPDDR4 1.5GHz 64 bit Graphic Resolution: 1920 x 1080 Output Resolution: 3840 x 2160 (Scale Up From Graphic Processing Result) - Supports OpenGL ES	LPDDR4 1.5GHz 64 bit Graphic Resolution: 1920 x 1080 Output Resolution: 3840 x 2160 (Scale Up From Graphic Processing Result) - Supports OpenGL ES	LPDDR4 1.5GHz 64 bit Graphic Resolution: 1920 x 1080 Output Resolution: 3840 x 2160 (Scale Up From Graphic Processing Result) - Supports OpenGL ES	LPDDR4 1.5GHz 64 bit Graphic Resolution: 1920 x 1080 Output Resolution: 3840 x 2160 (Scale Up From Graphic Processing Result) - Supports OpenGL ES
		Storage (FDM)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)
		Multimedia	Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 Audio Decoder: AC3 (DD), MPEG	Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 Audio Decoder: AC3 (DD), MPEG	Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 Audio Decoder: AC3 (DD), MPEG	Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 Audio Decoder: AC3 (DD), MPEG
		IO Ports	USB 2.0	USB 2.0	USB 2.0	USB 2.0
		Operating System	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
		Accessories	Included	Quick Setup Guide, Regulatory Guide, Warranty Card, Power Cord, Remote Controller, Batteries, IR, Ambient Sensor		
Certification	Safety	UL(USA): cUL60950-1	UL(USA): cUL60950-1	UL(USA): cUL60950-1	UL(USA): cUL60950-1	
	EMC	FCC (USA) Part 15, Subpart B Class A	FCC (USA) Part 15, Subpart B Class A	FCC (USA) Part 15, Subpart B Class A	FCC (USA) Part 15, Subpart B Class A	
Service	Standard Warranty	3 Years (Parts / Labor / Backlight)	3 Years (Parts / Labor / Backlight)	3 Years (Parts / Labor / Backlight)	3 Years (Parts / Labor / Backlight)	

Connectivity

- RS232C Out / In
- Audio Out
- IR In
- Ambient Sensor In
- USB
- LAN Out
- LAN In
- HDMI 1 In
- HDMI 2 In
- DP In
- HDMI Out

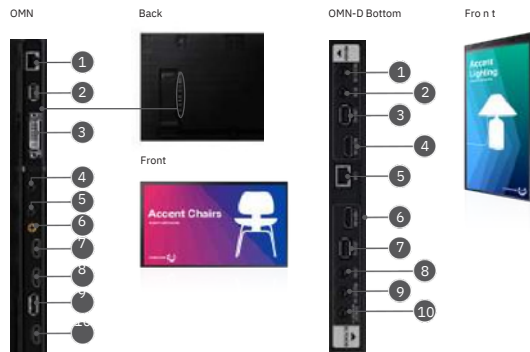

ProCare

Samsung ProCare Indoor Display Solutions

- FastTrack with White Glove Next Business Day Service
- Includes tech-assisted exchange of display: Technician removes original unit, installs replacement and ships non-working unit to Samsung
- Fast Track Next Business Day Exchange
- Return shipping label provided, customer returns original unit in new unit's box
- Available on sizes 32"-85"
- 3-5 year terms available



Call us at (833) 351-5333
Visit us: www.elevate-b2b.com

Contact Elevate B2B Today

Your trusted partner for hospitality TVs, digital signage, and commercial display solutions. From installation to supply chain support, Elevate B2B delivers the technology and service your property needs.