

Brilliant and engaging: a proven recipe for success.

All-in-one 4K interactive touchscreen displays

Add interactivity to any environment with Samsung's QMR-T touchscreen display. With a bright and responsive interactive display, these commercial-grade large format displays are designed to leverage a variety of content and create engaging experiences. Showcase exciting brand experiences, create endless aisles, offer self-ordering kiosks and provide interactive way-finding. With an IP5X rating, Samsung's QMR-T series touchscreen displays are built to withstand the rigors of continuous public use, and a 3-year warranty adds peace of mind.



Key Features



All-in-One interactive digital signage solution

The Samsung QMR-T series combines an embedded media player with MagicINFO, powerful Tizen OS, multi-touch interactivity and premium UHD Samsung display into integrated all-in-one solution. No need for an external player. And the advanced Tizen OS enables a wide variety of apps.



MagicINFO digital signage CMS platform to power business

MagicINFO is our leading-edge digital signage platform that makes content management easier, more flexible and more robust. Easily create content with included templates. Use the data capture tools to inform content creation and automated, targeted distribution. And manage it all from a single source.



Multi-point capacitive touch

Exceptionally responsive capacitive touch functionality makes for an engaging and intuitive user experience.



Easy-to-see, bright 4K UHD non-glare panels

Samsung's QMR-T series features UHD resolution (FHD on 32") to deliver incredibly clear and detailed content. Non-glare glass (43" and 55") offers improved visibility and eliminates distracting reflections that may impede customer engagement, while the haze coating creates a smoother feel.



IP5X for lasting durability

IP5X rating ensures efficient and reliable performance even in dusty environments. In addition, a conformal coating on the display provides longevity even in public spaces, which reduces overall cost of operation.



Convenient control with a centralized IR receiver

Control content easier with an intelligently designed IR receiver. Instead of a single point of reception, QMR-T series displays receive IR signals across their entire panels, making remote content control much easier and more reliable.



Long runtimes for reliable, continuous operation


Commercial-level cooling technologies offer dependable reliability. The Samsung QMR-T Series 55"/43" are designed to deliver messages all day and all night, while the 32" model delivers 16/7 runtime.

Samsung QMR-T Series Displays

		QM32R-T	QM43R-T	QM55R-T		
Panel	Screen Size	32"	43"	55"		
	Panel Type	Edge LED BLU	Edge LED BLU	Edge LED BLU		
	Resolution	FHD (1920 x 1080)	UHD (3840 x 2160)	UHD (3840 x 2160)		
	Brightness (Typ.)	500 nits (with Touch Glass), 400 nits (without Touch Glass)	400 nits (with Touch Glass), 500 nits (without Touch Glass)	400 nits (with Touch Glass), 500 nits (without Touch Glass)		
	Contrast Ratio (Typ.)	5000:1	5000:1	5000:1		
	Viewing Angle (H / V)	178° / 178°	178° / 178°	178° / 178°		
	Response Time (Typ.)	8ms GTG	8ms GTG	8ms GTG		
	Display Colors	16.7M (True Display), 1.07B (Dithered 10-bit)	16.7M (True Display), 1.07B (Dithered 10-bit)	16.7M (True Display), 1.07B (Dithered 10-bit)		
	Color Gamut	72%	92% (DCI-P3, CIE 1976)	92% (DCI-P3, CIE 1976)		
	Operation Hours	16/7	24/7	24/7		
	Anti-Glare	No	Yes	Yes		
	Panel Orientation	Landscape / Portrait	Landscape / Portrait	Landscape / Portrait		
	Special Certification	IP5X	IP5X	IP5X		
Special Certification	Speaker Type	Built in Speaker (10W + 10W) DisplayPort 1.2 (1)	Built in Speaker (10W + 10W) DVI-D, DisplayPort 1.2 (1)	Built in Speaker (10W + 10W) DVI-D, DisplayPort 1.2 (1)		
	Sound	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)		
Connectivity	Input	RGB	HDCP 2.2	HDCP 2.2		
		Video	HDMI	Stereo Mini Jack, DVI, HDMI		
		HDCP	USB 2.0 x 2	USB 2.0 x 2		
	Output	Audio	HDMI 2.0 (Loop-out)	HDMI 2.0 (Loop-out)	HDMI 2.0 (Loop-out)	
		USB	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	
		RS232C	RS232C (in/out) through Stereo Jack, RJ45	RS232C (in/out) through Stereo Jack, RJ45	RS232C (in/out) through Stereo Jack, RJ45	
External Control	IR	IR	IR			
External Sensor	Yes / Yes	Yes / Yes	Yes / Yes			
Wi-Fi / Bluetooth	Internal	Internal	Internal			
Power	Type	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz		
	Power Supply	72 W	110 W	143 W		
	Consumption	0.5 W 45 W 65 W 245.7 0.5 29.31" x 17.5" x 1.9" / 744.4 x 444.6 x 48.2 mm 34.33" x 22.24" x 5.24" / 872 x 565 x 133 mm 8.3 lbs. 11.1 lbs.	0.5 W 72 W 100 W 375.1 0.5 38.83" x 23.01" / 986.2 x 584.4 x 56.7 mm 44.65" x 28.54" x 5.55" / 1134 x 725 x 141 mm 14.5 lbs. 18.7 lbs.	0.5 W 107 W 130 W 487.63 0.5 49.36" x 28.92" x 2.23" / 1253.8 x 734.6 x 56.7 mm 55.94" x 34.8" x 6.5" / 1421 x 884 x 165 mm 26.9 lbs. 32.5 lbs.		
Mechanical	Dimensions	Set 200 x 200 mm Foot Stand (Optional)	Set 200 x 200 mm Foot Stand (Optional)	Set 200 x 200 mm Foot Stand (Optional)		
	Weight	Set 24.5 (U/D), 21.5 (L/R)	Set 26.0 (U/D), 21.0 (L/R)	Set 26.0 (U/D), 21.0 (L/R)		
	VESA Mount	Set 32" - 104" / 0°C - 40°C	Set 32" - 104" / 0°C - 40°C	Set 32" - 104" / 0°C - 40°C		
	Stand Type	Package 10-80% Capacitive Touch	Package 10-80% Capacitive Touch	Package 10-80% Capacitive Touch		
Environmental Conditions Features	Operating Temperature	Humidity	Temperature Sensor, Pivot Display, Clock Battery (168 Hrs Clock Keeping), Built-in Speaker (10W x 2), Video Wall Daisy Chain (HDCP 2.2 x 4, HDCP 1.4 x 7), IP5X Rating, Wi-Fi, Bluetooth	Temperature Sensor, Pivot Display, Clock Battery (168 Hrs Clock Keeping), Built-in Speaker (10W x 2), Video Wall Daisy Chain (HDCP 2.2 x 4, HDCP 1.4 x 7), IP5X Rating, Wi-Fi, Bluetooth		
		Touch	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug and Play (Initial Setting)	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug and Play (Initial Setting)		
	Special	Hardware	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	
			L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 1.7GHz	L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 1.7GHz	L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 1.7GHz	
		Software	Processor	2.5GB, LPDDR4 1.5GHz, 64-bit	2.5GB, LPDDR4 1.5GHz, 64-bit	2.5GB, LPDDR4 1.5GHz, 64-bit
			On-Chip Cache	Graphic resolution: 1920 x 1080 Output resolution: 3840 x 2160 (Scale up from graphic processing result)	Graphic resolution: 1920 x 1080 Output resolution: 3840 x 2160 (Scale up from graphic processing result)	Graphic resolution: 1920 x 1080 Output resolution: 3840 x 2160 (Scale up from graphic processing result)
		Memory	Clock Speed	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)
			Main Memory	Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	Video Decoder: MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9
		Internal Player (Embedded H/W)	Interface	Audio Decoder: AC3 (DD), MPEG USB 2.0	Audio Decoder: AC3 (DD), MPEG USB 2.0	Audio Decoder: AC3 (DD), MPEG USB 2.0
			Graphics Storage (FDM)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
		IO Ports	Operating System	60950-1 Class B (TBD) ENERGY STAR 8.0, Epeat 802.1x (WPA2 Enterprise): EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries STN-L4355F WMN4070SE	60950-1 Class B ENERGY STAR 8.0, Epeat 802.1x (WPA2 Enterprise): EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries STN-L4355F WMN4070SE	60950-1 Class B ENERGY STAR 8.0, Epeat 802.1x (WPA2 Enterprise): EAP-TLS, EAP-TTLS, EAP-PEAP Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries STN-L4355F WMN4070SE
			Operating System	Controller, Batteries	Controller, Batteries	Controller, Batteries
		Certification	Safety	CML400XX	CML400XX	CML400XX
EMC	Environment	3 Years Parts / Labor	3 Years Parts / Labor	3 Years Parts / Labor		
Security	Accessories					
Warranty	Included					
	Optional	Stand Mount Specialty				

Connectivity

1. USB 1 (1.0A)
2. RJ45
3. RS232C In
4. DVI / MagicInfo In
5. HDMI In 1 (ARC)
6. HDMI In 2 (Daisy Chain In)
7. DisplayPort In (Daisy Chain In)
8. HDMI Out (Daisy Chain Out)
9. USB 2 (0.5A)
10. DVI / HDMI Audio In
11. Audio Out
12. RS232C Out
13. IR In

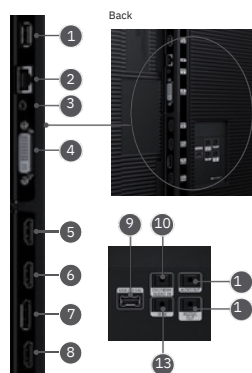

Call us at (833) 351-5333
Visit us: www.elevate-b2b.com

Contact Elevate B2B Today

Your trusted partner for hospitality TVs, digital signage, and commercial display solutions. From installation to supply chain support, Elevate B2B delivers the technology and service your property needs.