

**QET 4K Crystal UHD Series Displays**

43.0"	QE43T	55.0"	QE55T	70.0"	QE70T	82.0"	QE82T
50.0"	QE50T	65.0"	QE65T	"	QE75T		
				75.0"			



# 4K that offers superior color, detail and affordability.

A 4K solution that's stunning, yet economical.

Upgrade your messaging with the Samsung QET series displays. Offering stunning 4K resolution with Samsung Crystal Display technology, the QET series delivers a premium picture while still fitting your budget. Its powerful Crystal 4K processor and intelligent upscaling technology ensure all content is displayed in UHD resolution with colorful, sharp detail. The three-sided bezel-less design integrates seamlessly into any environment. And Samsung's MagicINFO Lite provides a simple way to manage content.



## Key Features


- 4K<sup>UHD</sup>** **Powerful Crystal UHD picture quality**  
 With an ultra-fast Crystal 4K processor and UHD resolution, you'll capture your customer's attention by showcasing lifelike images and intricate details better than ever before. Content will be displayed with more accurate and smoother color in brilliant 4K, no matter the source.
- M** **Load and share content with ease**  
 Each QET series display leverages the integrated MagicINFO Lite Player to bring to life a range of on-demand or pre-scheduled images and videos. Users can load new content either by connecting their personal laptop directly to the display's built-in port or by transferring from a compatible USB drive. For advanced USB convenience, the QET series allows users to store content in a specific folder that will play conveniently without the need for separate scheduling.
- Wi-Fi** **Control displays in multiple locations instantly**  
 The connection to MagicINFO Server allows remote monitoring and management of the QET Series displays. Device information, content playback schedules, network data monitoring, time scheduling, alarms and various controls are all available remotely without having to be in front of the displays.
- |—** **Slim and modern design**  
 The QET series' sleek, elegant and minimalistic design blends seamlessly into any business environment and draws customers into your content from any angle. And with a super-slim bezel, Samsung's QET series keeps the focus on your content.
- 3<sup>yr</sup>** **Full 3-year commercial warranty, 16/7 operation**  
 Featuring an impressive 3-year warranty, the QET series is built to operate reliably 16 hours a day, 7 days a week.

# Samsung QET 4K Crystal UHD Series Displays

		QE43T	QE50T	QE55T	QE65T	QE70T	QE75T	QE82T	
Panel	Screen Size	43"	50" Direct LED BLU UHD (3840 x 2160) 300 nits	55" Direct LED BLU UHD (3840 x 2160) 300 nits	65" Direct LED BLU UHD (3840 x 2160) 300 nits	70" Direct LED BLU UHD (3840 x 2160) 300 nits	75" Direct LED BLU UHD (3840 x 2160) 300 nits	82" Direct LED BLU UHD (3840 x 2160) 300 nits	
	Panel Type	Direct LED BLU UHD (3840 x 2160) 300 nits	Direct LED BLU UHD (3840 x 2160) 300 nits	Direct LED BLU UHD (3840 x 2160) 300 nits	Direct LED BLU UHD (3840 x 2160) 300 nits	Direct LED BLU UHD (3840 x 2160) 300 nits	Direct LED BLU UHD (3840 x 2160) 300 nits	Direct LED BLU UHD (3840 x 2160) 300 nits	
Special Certifications	Brightness (Typ.)	300 nits	300 nits	300 nits	300 nits	300 nits	300 nits	300 nits	
	Contrast Ratio (Typ.)	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1	
	Viewing Angle (H/V)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	
	Response Time (G-to-G)	8ms (Typ.)	8ms (Typ.)	8ms (Typ.)	8ms (Typ.)	8ms (Typ.)	8ms (Typ.)	8ms (Typ.)	
	Display Colors	16.7M (True Display) (NTSC) 72%	16.7M (True Display) (NTSC) 72%	16.7M (True Display) (NTSC) 72%	16.7M (True Display) (NTSC) 72%	16.7M (True Display) (NTSC) 72%	16.7M (True Display) (NTSC) 72%	16.7M (True Display) (NTSC) 72%	
	Color Gamut	IP5X	IP5X	IP5X	IP5X	IP5X	IP5X	IP5X	
	Operation Hours	16/7	16/7	16/7	16/7	16/7	16/7	16/7	
	Anti Glare Panel	No	No	No	No	No	No	No	
	Display Orientation	Landscape Only	Landscape Only	Landscape Only	Landscape Only	Landscape Only	Landscape Only	Landscape Only	
	Special Certification	IP5X	IP5X	IP5X	IP5X	IP5X	IP5X	IP5X	
Sound	Speaker Type	Built in Speaker (10W + 10W) HDMI 2.0 (2)	Stereo Mini Jack RS232C (in) thru Stereo Jack, RJ45	Built in Speaker (10W + 10W) HDMI 2.0 (2)	Built in Speaker (10W + 10W) HDMI 2.0 (2)	Built in Speaker (10W + 10W) HDMI 2.0 (2)	Built in Speaker (10W + 10W) HDMI 2.0 (2)	Built in Speaker (10W + 10W) HDMI 2.0 (2)	
	Input	Video: HDMI 2.0 (2) HDCP 2.2 Stereo Mini Jack, HDMI/Audio (Common) USB 2.0 x 1 Audio: Stereo Mini Jack	AC 100 - 240V- (+/- 10%), 50/60 Hz 149 95 Stereo Mini Jack	AC 100 - 240V- (+/- 10%), 50/60 Hz 149 95 Stereo Mini Jack	AC 100 - 240V- (+/- 10%), 50/60 Hz 149 95 Stereo Mini Jack	AC 100 - 240V- (+/- 10%), 50/60 Hz 149 95 Stereo Mini Jack	AC 100 - 240V- (+/- 10%), 50/60 Hz 149 95 Stereo Mini Jack	AC 100 - 240V- (+/- 10%), 50/60 Hz 149 95 Stereo Mini Jack	AC 100 - 240V- (+/- 10%), 50/60 Hz 149 95 Stereo Mini Jack
Connectivity	Output	RS232C (in) thru Stereo Jack, RJ45	Internal	RS232C (in) thru Stereo Jack, RJ45	Internal	RS232C (in) thru Stereo Jack, RJ45	Internal	RS232C (in) thru Stereo Jack, RJ45	
	External Control	Internal AC 100 - 240V- (+/- 10%), 50/60 Hz	44.0" x 25.4" x 2.4"	Internal AC 100 - 240V- (+/- 10%), 50/60 Hz	44.0" x 25.4" x 2.4"	Internal AC 100 - 240V- (+/- 10%), 50/60 Hz	44.0" x 25.4" x 2.4"	Internal AC 100 - 240V- (+/- 10%), 50/60 Hz	
Power	Type	AC 100 - 240V- (+/- 10%), 50/60 Hz	49.8" x 30.7" x 5.9"	AC 100 - 240V- (+/- 10%), 50/60 Hz	49.8" x 30.7" x 5.9"	AC 100 - 240V- (+/- 10%), 50/60 Hz	49.8" x 30.7" x 5.9"	AC 100 - 240V- (+/- 10%), 50/60 Hz	
	Power Supply	121 80 110 412.6	25.8 lbs. 35.5 lbs. 200 x 200 mm Foot Stand (Optional)	154 105 140 525.1	154 105 140 525.1	204 145 185 695.6	242 180 220 825.2	242 180 220 825.2	275 211 250 937.8
Mechanical	Dimensions	25.4 lbs. 200 x 200 mm Foot Stand (Optional)	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	42.5 lbs. 200 x 200 mm Foot Stand (Optional)	42.5 lbs. 200 x 200 mm Foot Stand (Optional)	64.8 lbs. 400 x 300 mm No	75.6 lbs. 400 x 300 mm No	114.9 lbs. 600 x 400 mm No	
	Weight	25.4 lbs. 200 x 200 mm Foot Stand (Optional)	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	42.5 lbs. 200 x 200 mm Foot Stand (Optional)	42.5 lbs. 200 x 200 mm Foot Stand (Optional)	64.8 lbs. 400 x 300 mm No	75.6 lbs. 400 x 300 mm No	114.9 lbs. 600 x 400 mm No	
Environmental Conditions	VESA Mount	Set Package	Temperature Sensor, Clock	Set Package	Temperature Sensor, Clock	Set Package	Temperature Sensor, Clock	Set Package	
	Stand Type	Set Package	Temperature Sensor, Clock	Set Package	Temperature Sensor, Clock	Set Package	Temperature Sensor, Clock	Set Package	
Features	Operating Temperature	10 - 80% Temperature Sensor, Clock	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	10 - 80% Temperature Sensor, Clock	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	10 - 80% Temperature Sensor, Clock	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	10 - 80% Temperature Sensor, Clock	
	Humidity	10 - 80% Temperature Sensor, Clock	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	10 - 80% Temperature Sensor, Clock	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	10 - 80% Temperature Sensor, Clock	Battery (168 hrs. Clock Keeping), Built-In Speaker (10W x 2), IP5x Rating and Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	10 - 80% Temperature Sensor, Clock	
Special	H/W	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	
	S/W	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	
	Processor	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
	On-Chip Cache	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
	Memory	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
	Clock Speed	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
	Main Memory Interface	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
	Graphics	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
	Internal Player (Embedded H/W)	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
	Storage (FDM)	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB
Multimedia	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	
IO Ports Operating System	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	Auto Source Switching and Recovery, LFD Home UI, Button Lock, Hot Key Option, Plug & Play (Initial Setting)	Cortex A72 1.7GHz Quad-Core CPU L1 Instruction Cache: 48KB L1 Data Cache: 32KB L2 Cache: 2MB 2.0GB	
Certification	Safety EMC	60950-1 Class B	60950-1 Class B	60950-1 Class B	60950-1 Class B	60950-1 Class B	60950-1 Class B	60950-1 Class B	
Accessories	Included	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	
	Optional	STN-L4355F WMN40705E CML400XK	STN-L4355F WMN40705E CML400XK	STN-L4355F WMN40705E CML400XK	STN-L4355F WMN40705E CML400XK	STN-L4355F WMN40705E CML400XK	STN-L4355F WMN40705E CML400XK	STN-L4355F WMN40705E CML400XK	
Service	Standard Warranty	3 Years Parts / Labor	3 Years Parts / Labor	3 Years Parts / Labor	3 Years Parts / Labor	3 Years Parts / Labor	3 Years Parts / Labor	3 Years Parts / Labor	

## Connectivity

1. USB (1.0A)
2. RS232C In
3. RJ45
4. HDMI In 1 (ARC)
5. HDMI In 2
6. Audio Out

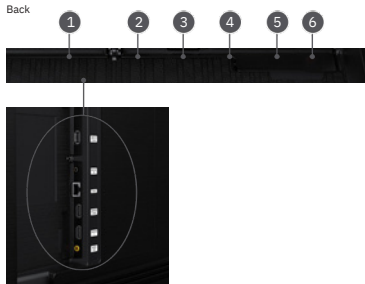

Call us at (833) 351-5333  
Visit us: [www.elevate-b2b.com](http://www.elevate-b2b.com)

**Contact Elevate B2B Today**  
Your trusted partner for hospitality TVs, digital signage, and commercial display solutions. From installation to supply chain support, Elevate B2B delivers the technology and service your property needs.